

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	V _{BUS}	Bus Power	B9	V _{BUS}	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use (SBU)	B5	CC2	Configuraaion Channel
A9	V _{BUS}	Bus Power	B4	V _{BUS}	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return



KEEP OUT AREA

MATERIAL NO.: Z-CF019XXXXX-X-13		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ZDT TECHNOLOGY, AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
		 深圳市中兴科达科技有限公司 SHENZHEN ZDT TECHNOLOGY CO., LTD				DRAWN BY Jay		DATE 2017.01.05	
REVIEW TABLE FOR DETAILS		TITLE USB 3.1 C TYPE FEMALE SINK CONNECTOR				CHECKED BY Allen		DATE 2017.01.05	
						APPROVED BY Jacke		DATE 2017.01.05	
QUALITY SYMBOL 0 ▽=0 0									

frame size: A4

10

9

8

7

6

5

4

3


2

1

REV	ECN No.	DATE	REMARK
A0	NEW	2015/07/10	新版发行
A1	ECN1701005	2017.01.05	变更新料号




出料方向
PULL OUT DIRECTEON

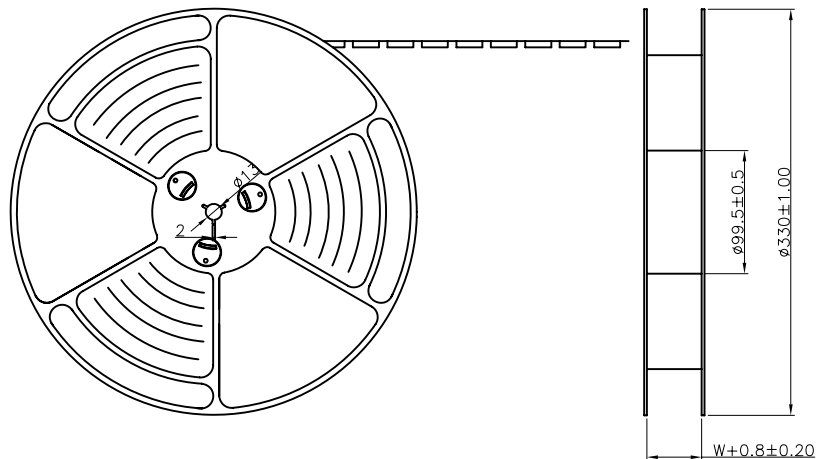


NOTES


- 1.帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

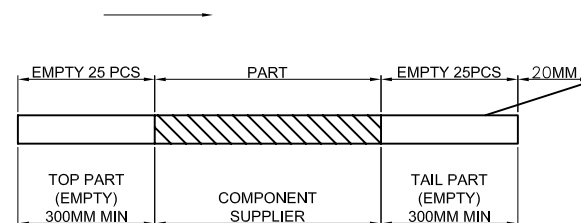

- 2.上帶 剝力力爲：0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE:0.1~1.3N(10.2gf~130gf)
出貨運輸過程中一定注意：
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT：
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION



RoHS Compliant

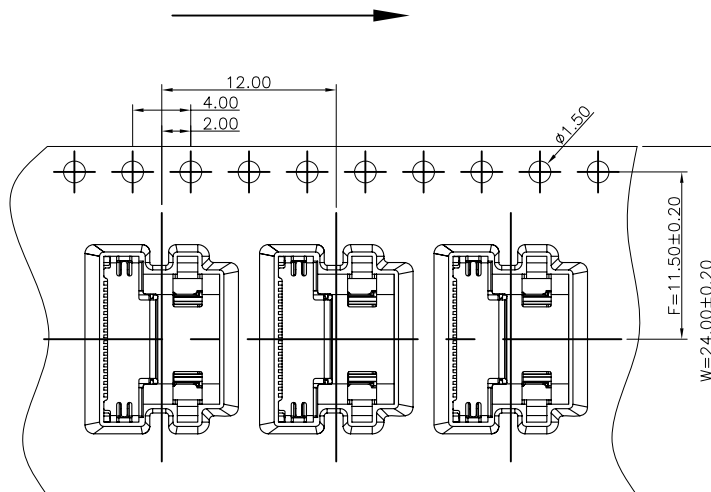

MATERIAL NO.:

Z-CF019XXXXX-X-13

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)
0	X.XXXX ± ---
▽	X.XXX ± ---
0	X.XX ± 0.25
▽	X.X ± 0.38
0	ANGULAR ± ---

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ZDT TECHNOLOGY. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION



深圳市中兴兴达科技有限公司
SHENZHEN ZDT TECHNOLOGY CO., LTD

DRAWN BY Jay DATE 2017.01.05

TITLE
USB 3.1 C TYPE FEMALE SINK CONNECTOR

CHECKED BY Allen DATE 2017.01.05

DOCUMENT NO.
Z-CF019-13


SHEET NO.
3 OF 4

APPROVED BY Jacke DATE 2017.01.05

DIMENSION STYLE
MM ONLY

DESIGN UNITS
METRIC

SCALE
5:1



THIRD ANGLE
PROJECTION

10

9

8

7

6


5

4


3

2

frame size: A4



Location of label sticking (label

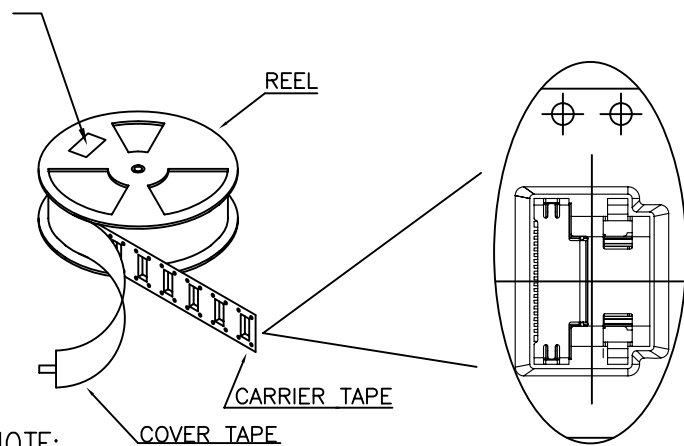

NOTE:

- 1.每捲包裝數量及每箱裝箱數量如左下表格.

Packing q'ty of each reel & carton as below table shown.

2. 以上膠帶覆蓋下包裝帶經包裝機熱熔包裝

Use cover tape to cover and hot melt machine to seal up.

3. 每個紙箱放2個珍珠棉

Every carton use 2pcs EPE.

- 4.將裝滿產品的卷盤放入紙箱并以膠帶封口

Put reels in the carton and use adhesive tape to seal up.

RoHS Compliant

包 裝 容 量 (PACKING CAPACITY)			重 量 WEIGHT (Kg)		
PCS/REEL	REELS/CARTON	PCS/CARTON	N.W./PCS	N.W./BOX	G.W./BOX
1500	8	12000			

MATERIAL NO.:		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ZDT TECHNOLOGY, AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
Z-CF019XXXXX-X-13		 深圳市中科兴达科技有限公司 SHENZHEN ZDT TECHNOLOGY CO., LTD			DRAWN BY Jay		DATE 2017.01.05							
REVIEW TABLE FOR DETAILS					CHECKED BY Allen		DATE 2017.01.05							
QUALITY SYMBOL  = 0  = 0.25  = 0.38  = ANGULAR	GENERAL TOLERANCES (UNLESS SPECIFIED)		TITLE USB 3.1 C TYPE FEMALE SINK CONNECTOR				APPROVED BY Jacke		DATE 2017.01.05					
	X.XXXX		± ---		DOCUMENT NO. Z-CF019-13		SHEET NO. 3 OF 4				 THIRD ANGLE PROJECTION			
	X.XXX		± ---											
	X.XX		± 0.25		DIMENSION STYLE MM ONLY		DESIGN UNITS METRIC						SCALE 5:1	
	X.X		± 0.38											
	ANGULAR		± --°											

frame size: A4