



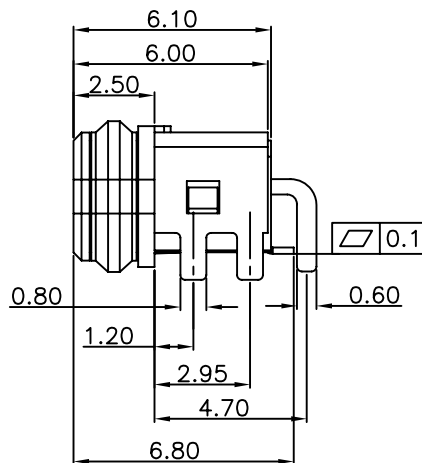
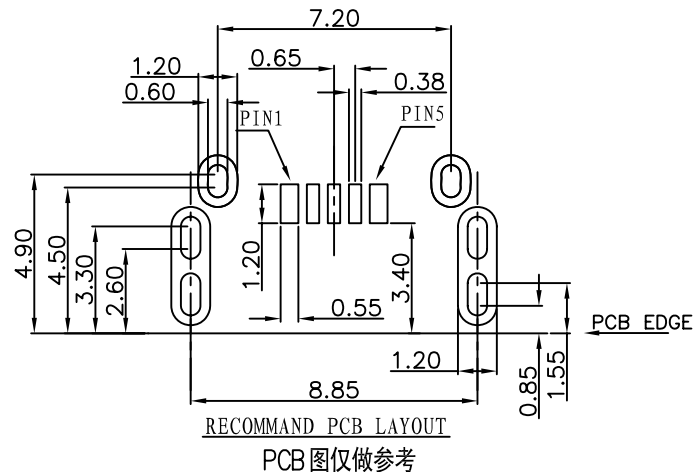



RoHS
Compliant

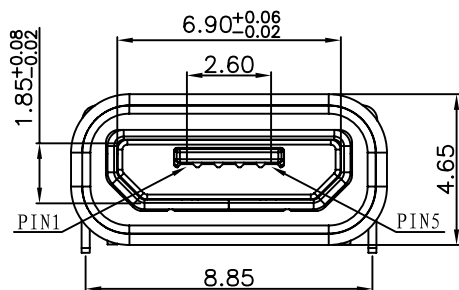

THIS DRAWING CONTAINS INFORMATION THAT IS
PROPRIETARY TO ZDT TECHNOLOGY, AND SHOULD
NOT BE USED WITHOUT WRITTEN PERMISSION

REV	ECN No.	DATE	REMARK
A	NEW	2015.05.10	NEW RELEASE

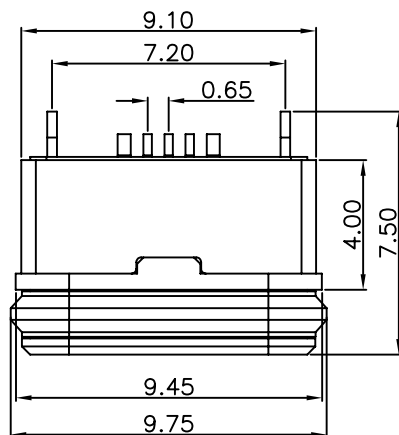

Note:

1.Material:

- 1.1 Housing: High temperature thermoplastic
- 1.2 Contact: copper alloy, t=0.20mm
- 1.3 Shell: SUS304, t=0.30mm
- 1.4 cover: High temperature thermoplastic
- 1.5 out Shell: SUS304 T=0.25
- 1.6 Ring: SILICON
- 1.7 Epoxy: Epoxy

2.Specification:

- 2.1 Current rating: 1,5PIN 2.0A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ, Max.
- 2.4 Insulation resistance: 100 MΩ, Min.
- 2.5 Total mating force: 3.57 Kg Max.
- 2.6 Total unmating force: 1.0 Kg Min.
- 2.7 Temperature range: -30°C~80°C
- 2.8 Waterproof: IPX68.

3. PART NUMBER CODE:

MF150-05 S L B 11 R - A - 22
(1)(2)

(1) HOUSING COLOR:

B:BLACK

(2) CONTACTS PLATED:

11:镀金1u"

PART NO.:
SEE THE PART NUMBER CODE

ZDT 深圳市中科兴达科技有限公司
SHENZHEN ZDT TECHNOLOGY CO., LTD

DRAWN BY
SAM

DATE
2015.05.10

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)
0	X.XXXX ± ---
0	X.XXX ± 0.10
0	X.XX ± 0.25
0	X.X ± 0.30
0	ANGULAR ± ---°

TITLE	DWG.NO.	SHEET NO.
MICRO USB 5S B TYPE防水型DIP型	MF150-05-22	1 OF 1
DIMENSION STYLE	DESIGN UNITS	SCALE
MM ONLY	METRIC	1:1

CHECKED BY	DATE
JAY	2015.05.10
APPROVED BY	DATE
JACKY	2015.05.10



frame size: A4