





RoHS Compliant 

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ZDT TECHNOLOGY. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REV	ECN No.	DATE	REMARK
A	NEW	2020.12.15	NEW RELEASE
B	---	2023.09.25	更新图纸描述



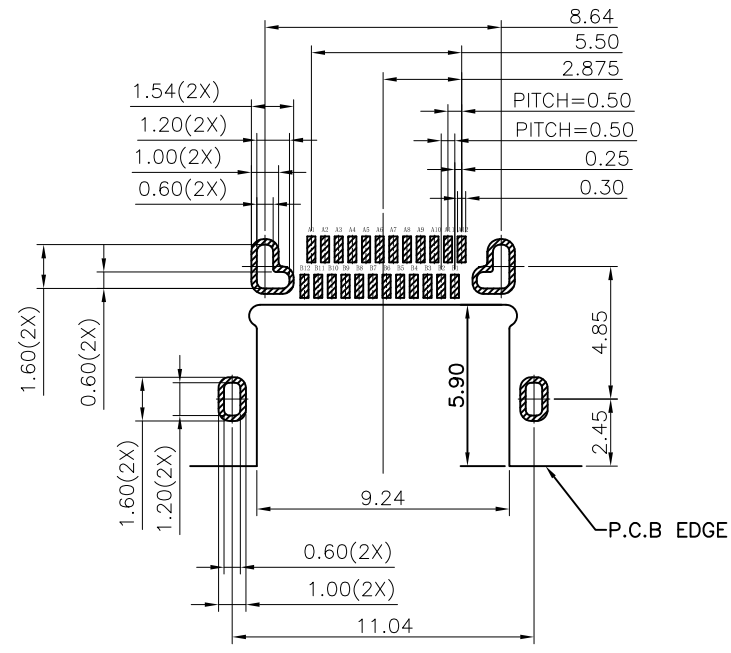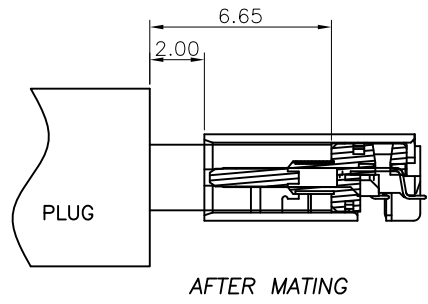



TID NO. 9899



RECOMMENDED PCB LAYOUT(TOP VIEW)  
THICKNESS 0.60MM;DEFAULT TOLERANCE:±0.05

PIN DEFINITION:

PIN No.	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
	GND	TX1+	TX1-	VBus	CC1	D+	D-	SBU1	VBus	RX2-	RX2+	GND
	GND	RX1+	RX1-	VBus	SBU2	D-	D+	CC2	VBus	TX2-	TX2+	GND
PIN No.	B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

PART NO.:		SEE THE PART NUMBER CODE		 深圳市中科兴达科技有限公司		DRAWN BY: SAM	
				SHENZHEN ZDT TECHNOLOGY CO., LTD		CHECKED BY: JAY	
QUALITY SYMBOL		GENERAL TOLERANCES		TITLE			
		x.xxxx	± ---	USB Type-C MID-MOUNT SINK0.8mm			
		x.xxx	± 0.10	DUAL ROW SMT, CH=0.78mm			
		x.xx	± 0.25	THIRD ANGLE PROJECTION		UNIT	SCALE
		x.x	± 0.30	ANGULAR		mm	1:1
						SHEET NO. 2 OF 2	DWG.NO. CF104-24-02

frame size: A4