
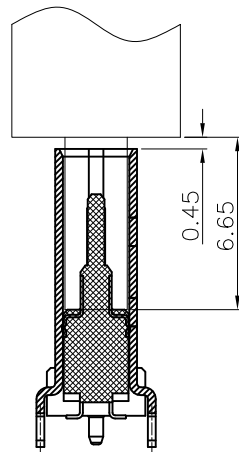


RoHS Compliant


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ZDT TECHNOLOGY. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REV	ECN No.	DATE	REMARK
A	NEW	2019.11.21	NEW RELEASE
B	ECR230913-001	2023.09.15	1. 取消底部掏料孔 2. 整理图纸

TYPE C协会认证TID NO. 3733

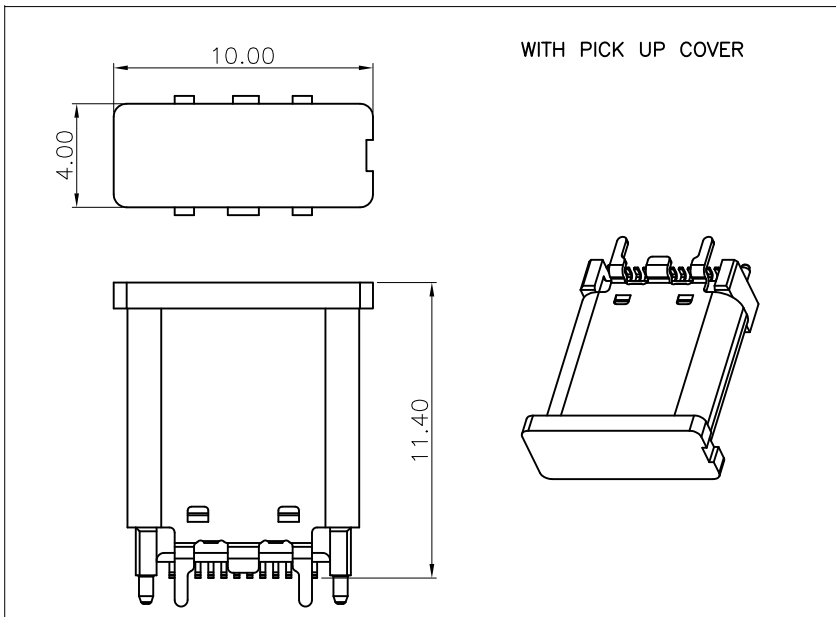

AFTER MATING

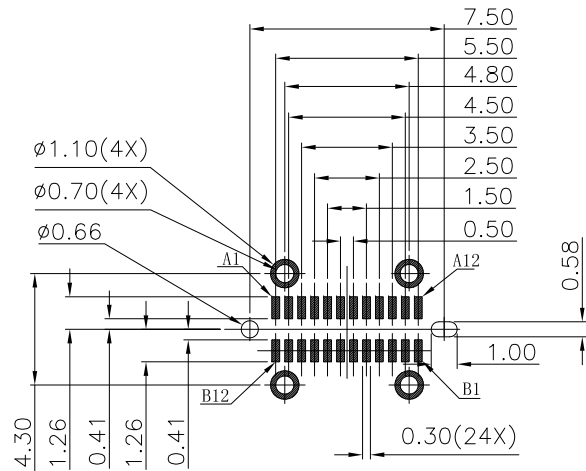

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 1.5±0.10MM;DEFAULT TOLERANCE:±0.05

PIN DEFINITION:

PIN No.	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
	GND	TX1+	TX1-	VBus	CC1	D+	D-	SBU1	VBus	RX2-	RX2+	GND
PIN No.	B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
	GND	RX1+	RX1-	VBus	SBU2	D-	D+	CC2	VBus	TX2-	TX2+	GND

PART NO.:		SEE THE PART NUMBER CODE		深圳市中科兴达科技有限公司		DRAWN BY: SAM	
QUALITY SYMBOL		GENERAL TOLERANCES		SHENZHEN ZDT TECHNOLOGY CO., LTD		CHECKED BY: JAY	
= 0		x.xxxx ± ---		TITLE		APPROVED BY: JACKY	
= 0		x.xxx ± 0.10		USB TYPE-C FEMALE 24PIN Vertical H=10.4		DWG.NO. CF175-24-02	
= 0		x.xx ± 0.25		THIRD ANGLE PROJECTION		SHEET NO. 1 OF 2	
= 0		x.x ± 0.30		UNIT mm		SCALE 1:1	
= 0		ANGULAR ± ---°		SHEET NO. 1 OF 2		DWG.NO. CF175-24-02	