
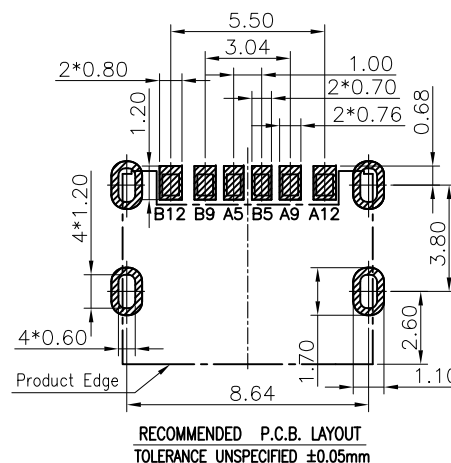
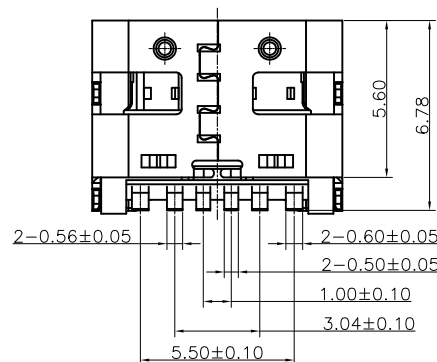
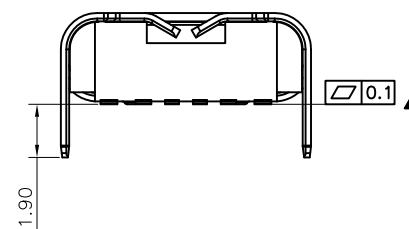

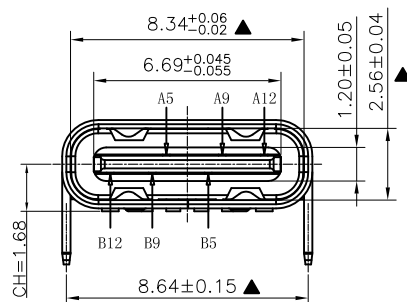



NOTE:

1. Electrical Characteristics:
 - 1-1: Current Rating: 3A For Pin(A4,A9,B4,B9)
1.25A For Pin(B5)
0.25A For Others Pin
 - 1-2: VOLTAGE RATING:5.0V
 - 1-3: Insulation Resistance: 100MΩ Min.
 - 1-4: Contact Resistance:
VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
SHIELD:50mΩ/MAX.
SHIELD:LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
 - 1-5: Dielectric Withstanding Voltage: 100V/AC 1Minute
2. Mechanical Characteristics:
Insertion Force: 5~20N
Extraction Force: Initial: 8~20N
After durability: 6~20N
Durability :10000 Cycles
3. Operating Temperature: -25°C TO +85°C
4. SALT SPRAY:24H
5. With"▲" for the key control size
6. PART NUMBER CODE:

Z-CF039S L B 11 XX - A -02
(1) (2) (3) (4)
- (1)HOUSING MATERIAL:
L:LCP
- (2)HOUSING COLOR:
B:BLACK
- (3) CONTACTS PLATED:
11:Au1u"
- (4) PACKING OPTIONS
R:TAPE & REEL
VR:TAPE & REEL+Vacuum packaging ▲
(The special customer specifies the package regulation)



PART NO.:		 深圳市中科兴达科技有限公司 SHENZHEN ZDT TECHNOLOGY CO., LTD					DRAWN BY: SAM	
SEE THE PART NUMBER CODE							CHECKED BY: JAY	
QUALITY SYMBOL 0 ▽ 0 ▽ 0	GENERAL TOLERANCES		TITLE USB TYPE-C FEMALE 6PIN SMT CH1.68 SOLDER TAB 2.0MM					
	X.XXXX	± ---						APPROVED BY: JACKY
	X.XXX	± 0.10	DWG.NO. Z-CF039-02					
	X.XX	± 0.20						
	X.X	± 0.30						
	ANGULAR	± °						
		 THIRD ANGLE PROJECTION	UNIT mm	SCALE 1:1	SHEET NO. 1 OF 1			

frame size: A4