

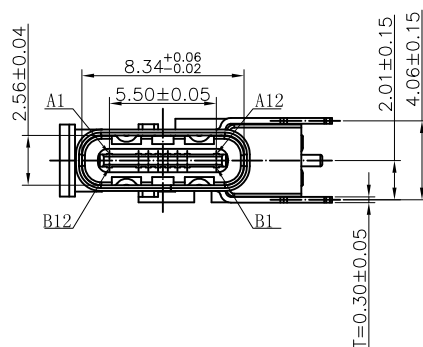
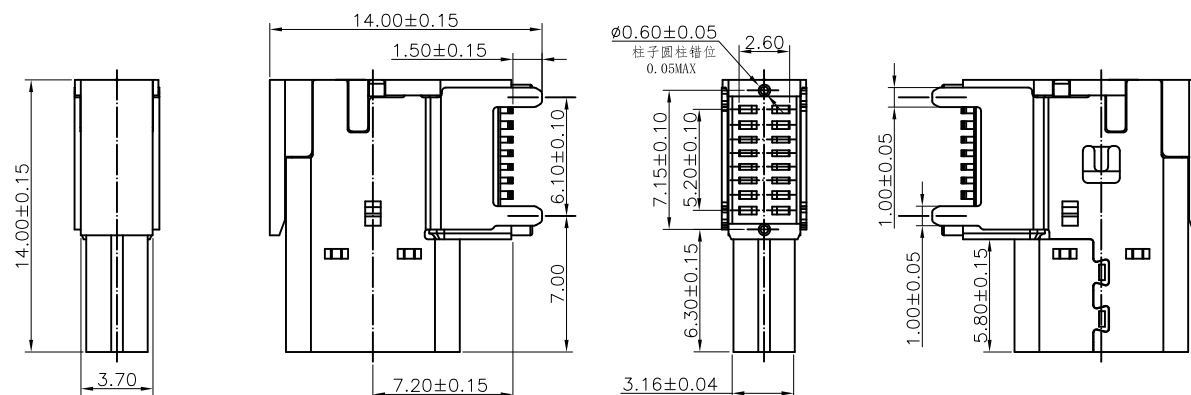
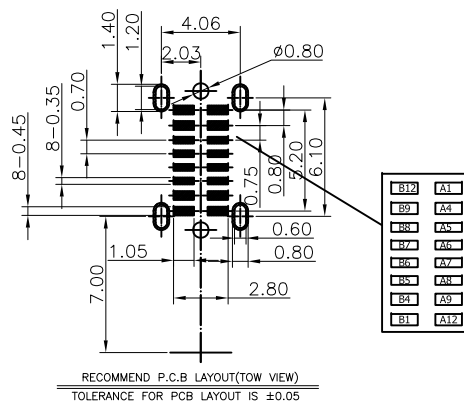


A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND

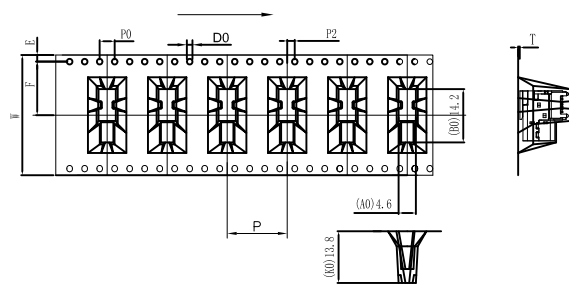

备注:




序号		名称	用量	品名规格								
1		外壳	1	Typec侧贴16PIN H=7.2外壳 SUS304 T=0.30mm								
2		Molding 3	1	Typec侧贴 SMT 16PIN Molding C7025 LCP黑色 H=7.2 半成品								
2.1		Molding 1	1	Typec侧贴 SMT 16PIN Molding A C7025 LCP黑色 H=7.2								
2.2		Molding 2	1	Typec侧贴 SMT 16PIN Molding B C7025 LCP黑色 H=7.2								
2.3		卡勾	1	Typec侧贴 SMT 16PIN 卡勾 SUS301 T=0.15mm								
PART NO.:				 深圳市中科兴达科技有限公司 SHENZHEN ZDT TECHNOLOGY CO., LTD				DRAWN BY: SAM				
SEE THE PART NUMBER CODE								CHECKED BY: JAY				
QUALITY SYMBOL  =   =   = 	GENERAL TOLERANCES			TITLE USB TYPE CF 16PIN 侧插 SMT CH=7.2								
	x.xxxx ± ---											
	x.xxx ± 0.10			THIRD ANGLE PROJECTION					UNIT mm	SCALE 1:1	SHEET NO. 1 OF 1	DWG.NO. CF616-002-02
	x.xx ± 0.15											
	x.x ± 0.30											
ANGULAR ± ---												

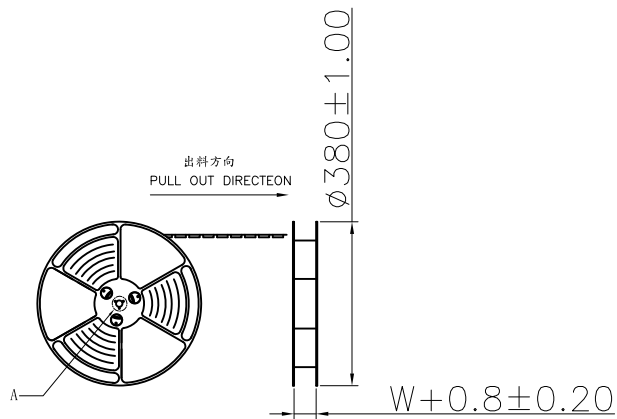



NOTES

1. 帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

2. 上帶 剝力力為: 0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N(10.2gf~130gf)
出貨 運輸過程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT;
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

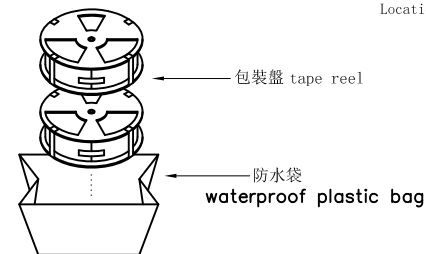

at small positioning hole of the carrier tape side).
標籤黏貼處 (朝捲裝包材的小定位孔一側)
Location of label sticking (label)

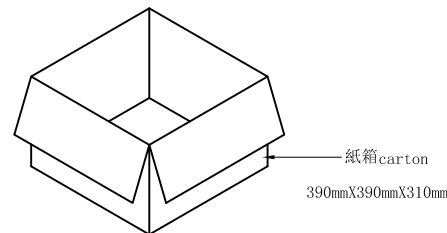

NOTE:

1. 每捲包裝數量及每箱裝箱數量如左下表格.
Packing q'ty of each reel & carton as below table shown.
2. 將裝滿產品的卷盤放入紙箱並以膠帶封口
Put reels in the carton and use adhesive tape to seal up.

W	32±0.3
F	14.2±0.1
S0	±0.1
T	0.50±0.1
E	1.75±0.1
P	16.0±0.1
P0	4±0.1
P2	2±0.15
A0	4.60±0.1
B0	14.2±0.1
K0	13.8±0.1
D0	1.50 ^{+0.1} _{-0.1}

卷帶	規格: Ø380mm	包裝數量: 400PCS
紙箱	規格: 390mmX390mmX310mm	包裝數量: 8盤 / 3200PCS

PART NO.: SEE THE PART NUMBER CODE		ZDT 深圳市中科兴达科技有限公司 SHENZHEN ZDT TECHNOLOGY CO., LTD				DRAWN BY: SAM	
QUALITY SYMBOL	0 = 0	GENERAL TOLERANCES		TITLE		CHECKED BY: JAY	
		x.xxxxx		± 0.10		APPROVED BY: JACKY	
		x.xxx		± 0.15		DWG.NO.	
		x.xx		± 0.30		1 OF 1	
		x.x		± 0.30		PK-CF616-002-02	
		ANGULAR		± 0.30		frame size: A4	